
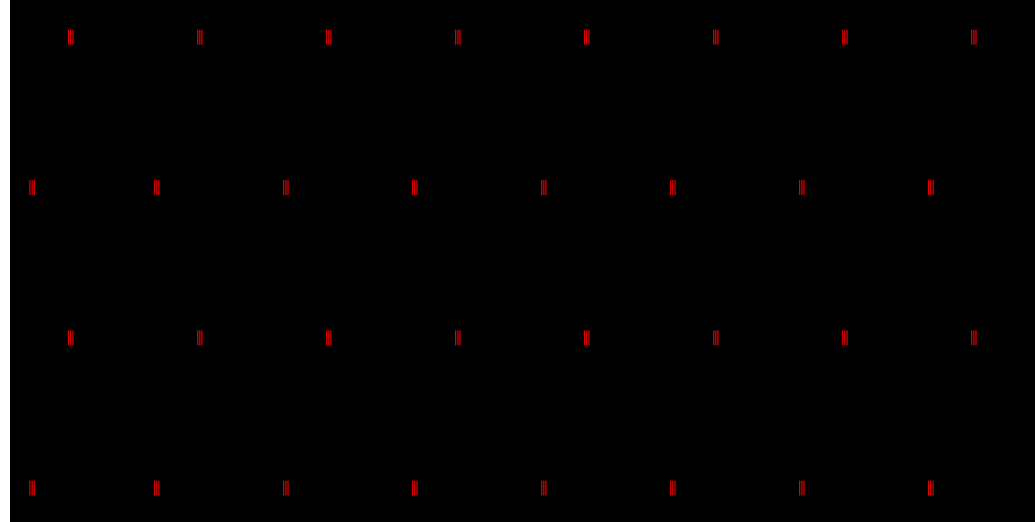


Emergency Ballasts or Centralized Inverter

20,000 Square Foot - Open Floor Plan - Utility Fail

20,000 Square Foot - Open Floor Plan - Utility Fail



1 Foot Candle Average = Qty 72, 1400 Lumen Fluorescent Battery Pack w/ SD Module

1 Foot Candle Average = 4.2kW Centralized Lighting Inverter

TYPICAL BUDGETARY EXPENSE W/ INSTALLATION = \$ 22,240.00

TYPICAL BUDGETARY EXPENSE W/ INSTALLATION = \$ 19,725.00

QTY: 72, Self Diagnostic Emergency Ballasts, \$267.00 each.....installed = \$20,304.00
QTY: 20, Battery Back Up Exit Sign, \$65.00 each..... installed = \$1,600.00
QTY: 2, Battery Pack (6V / 30W) \$110.00 each..... installed = \$250.00
QTY: 2, Outdoor Lamp (6V / 30W) \$ 28.00 each.....installed = \$86.00

QTY: (1) 4.2kW Lighting Inverter with Intellistat, (3) ZoneSavers, E-Mail NFPA 101 test results, E-Mail service required installed = \$18,215.00
QTY: 20, AC Exit Signs \$50.00 each..... installed = \$1,300.00
QTY: 2, 70W / HID wall packs \$90.00 each..... installed = \$210.00

Connected loads:

(32) 32W / 3 lamp fluorescents, (20) AC Exit Signs, (2) 70W / HID wall packs = ~3,900W

SELF-TESTING
 AUTOMATIC MONTHLY NFPA 101; RESULTS NOT AUTOMATICALLY LOGGED.
 NOT CAPABLE OF PERFORMING REQUIRED ANNUAL NFPA 101 TESTING

SELF-TESTING & SELF-DIAGNOSTIC
 AUTOMATIC MONTHLY NFPA 101; RESULTS AUTOMATICALLY LOGGED (2 years)
 AUTOMATIC ANNUAL NFPA 101; RESULTS AUTOMATICALLY LOGGED (2 years)
 AUTOMATIC E-MAIL NFPA 101 REPORT (Pass / Fail – Time, Date Stamp)
 AUTOMATIC E-MAIL “SERVICE REQUIRED” (E-Mail sent to select service provider)